

evolIS

Identify what matters

Issengo



MAXIMUM
SECURITY

OPTIMIZED
FOOTPRINT

INCREASED
FLEXIBILITY



PRINTER

The Compact and Secure Solution for Issuing Financial Cards in Your Branches




The **Issengo** system combines advanced features, compactness, ease of use and seamless integration in branches. Issengo issues flat debit and credit cards on demand, and complies with international banking associations security guidelines.



Maximum Security

- Issengo's **electromechanical locking system** prevents access to the blank and rejected cards, ribbon, and internal parts of the machine. It can be configured for dual access control for increased security.
- The patented **Kineclipse® innovation** masks any residual sensitive data left on the printing ribbon.




Optimized Footprint

- The Issengo system features a compact and durable design, making it ideal for seamless integration into branch work spaces or kiosk locations, where it can withstand various environmental conditions.
- The system can be controlled by a completely dematerialized interface**, thus not requiring the deployment of a dedicated computer nearby.



ISSENGO



Increased Flexibility

- Issengo can automatically customize a card design** in batches or exceptional designs through manual card insertion.
- The **Evolis Mosaic SDK** is designed to facilitate software integration and allow secure communication with existing information systems.



- 100-card feeder and slot for single manual card insertion
- Electromechanical locking system

- Color LCD touch screen

- Kineclipse® process for masking the residual characters left on the printing ribbon

Main Features

General Features

- Direct-to-card dye-sublimation/
Resin thermal transfer
- Edge-to-edge, single or dual-sided
printing
- Standard 300 x 300 dpi resolution
- Embedded PC card

Printing Performances

- Dual-side:
 - Monochrome (KO/KO): 24 s per card
 - Color (YMCKO-K): 32 s per card

Interfaces

- Ethernet TCP-IP 10BaseT, 100BaseT
(Traffic Led)
- USB A port inside the system

Card Management & Specifications

- Feeder capacity: 100 cards
(0.76 mm - 30 mil)
- Slot for manual insertion of
exceptional designs
- Output hopper capacity: 50 cards
(0.76 mm - 30 mil)
- Internal reject tray capacity:
10 cards (0.76 mm - 30 mil)
- Option: Reject tray/output hopper
capacity at the back: 50 cards
(0.76mm - 30mil)
- Card thickness:
 - Feeder : 0.50 - 1.25 mm
(20 - 50 mil), gauge adjustment
 - Manual insertion slot:
0.50 - 0.76 mm (20 - 30 mil)
- Card types: PVC cards, composite
PVC cards, PET cards, ABS cards¹,
special varnished cards¹
- Card format: ISO CR80 - ISO 7810
(53.98 mm x 85.60 mm)

Additional Encoding Modules

- Available modules:
 - Magnetic stripe encoder ISO 7811
HiCo/LoCo, JIS2
 - Smart contact station ISO 7816-2
 - Contact smart card encoder - PC/
SC, EMV 2000-1
 - Contactless smart card encoder -
ISO 14443A, B, ISO15693, MIFARE,
DESFire, HID iCLASS
 - Other specific encoders upon
request
- Options can be combined
- Factory-installed or installed on site

Safety

- Electromechanical locking system
with optional dual access control
- Kineclipse® process for masking
the residual data left on the
printing ribbon
- Data encryption (SSL/TLS),
supports 3DES and AES-256
- Support for Kensington® security
lock

Display

- Color touch screen display (2.4")

Software

- Evolis Mosaic SDK for remote
supervision of the printer,
easy integration and secure
communication

Evolis High Trust® Ribbons

To maximize the quality and durability of printed cards, the lifespan of the print head and the overall printer reliability, use Evolis High Trust® ribbons.

- Automatic identification and
setting
- Delivered in a drop-in cassette for
easy handling
- Ribbon saver for monochrome
printing

List of ribbons available on
www.evolis.com

Eco-Friendly Design, Certifications & Statement of Compliance


- Standby mode & reduced energy
consumption
- CE, FCC, ICES, EAC
- RoHS

Size & Weight

- Size (H x W x D):
247 x 211 x 392 mm (9.72" x 8.31" x
15.43")
- Weight: 6.3 kg (13.23 lbs)

Warranty

- 2-year warranty (printer and print
head)²
- Warranty extension available as an
option

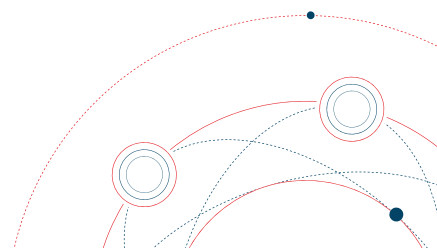



evolIS

Identify what matters

A GLOBAL PROVIDER OF IDENTIFICATION SOLUTIONS

- ⦿ **Worldwide leader** in card personalization systems for decentralized issuance
- ⦿ **International expertise and local support** through a network of 400 distributors in 140 countries
- ⦿ A unique ability to meet specific customer specifications with a **Project department dedicated to design and construction of tailor-made solutions**
- ⦿ **Evolis is ISO 9001 certified**, which reflects our comprehensive approach, both in terms of quality and continuous improvement

www.evolis.com

HQ / EUROPE - MIDDLE-EAST - AFRICA

Evolis - 14 avenue de la Fontaine - ZI Angers-Beaucouzé
49070 - Beaucouzé - FRANCE
T +33 (0) 241 367 606 - F +33 (0) 241 367 612 - info@evolis.com

USA - CANADA

Evolis Inc. - Providence - RI - USA - evolisinc@evolis.com

LATIN AMERICA

Evolis Inc. - Fort Lauderdale - FL - USA - evolisinc@evolis.com

ASIA - PACIFIC

Evolis Asia Pte Ltd - Singapore - evolisasia@evolis.com

CHINA

Evolis China - Shanghai - evolischina@evolis.com

INDIA

Evolis India - Mumbai - evolisindia@evolis.com